

PCTWORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : C08F 4/80, B01J 31/28, C08F 4/02, 10/00	A1	(11) International Publication Number: WO 97/48736 (43) International Publication Date: 24 December 1997 (24.12.97)
(21) International Application Number: PCT/US97/10418 (22) International Filing Date: 17 June 1997 (17.06.97) (30) Priority Data: 60/020,095 17 June 1996 (17.06.96) US (71) Applicant: EXXON CHEMICAL PATENTS INC. [US/US]; 5200 Bayway Drive, Baytown, TX 77520-5200 (US). (72) Inventors: VAUGHAN, George, Alan; 3606 Durhill Street, Houston, TX 77025 (US). CANICH, Jo, Ann, Marie; 900 Henderson Avenue #808, Webster, TX 77058 (US). MAT- SUNAGA, Phillip, T.; 501 Davis Road No. G303, League City, TX 77573 (US). GINDELBERGER, David, Edward; 2 Morgan Court, Bedminster, NJ 07921 (US). SQUIRE, Kevin, Richard; 2111 Seven Maples Drive, Kingwood, TX 77345 (US). (74) Agents: MULLER, William, G. et al.; Exxon Chemical Company, P.O. Box 2149, Baytown, TX 77522-2149 (US).		(81) Designated States: AU, CA, CN, HU, JP, KR, European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published <i>With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>
(54) Title: SUPPORTED LATE TRANSITION METAL CATALYST SYSTEMS (57) Abstract The invention encompasses late transition metal catalyst systems immobilized on solid supports and their use in heterogenous polymerization processes, particularly in gas phase polymerization of olefin monomers. Preferred embodiments include a late transition metal catalyst system comprising a Group 9, 10, or 11 metal complex stabilized by a bidentate ligand structure immobilized on a solid porous metal or metalloid oxide particle support, particularly those comprising silica. The gas phase polymerization process for olefin monomers comprises contacting one or more olefins with these catalyst systems under gas phase polymerization conditions.		

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

SUPPORTED LATE TRANSITION METAL CATALYST SYSTEMS

FIELD OF THE INVENTION

5 This invention relates to supported late transition metal catalyst systems, means of preparing them and polymerization of olefins using them.

BACKGROUND OF THE INVENTION

10 Early transition metal catalysts for olefin polymers by coordination polymerization are well-known, typically those are the traditional Ziegler-type catalysts based on Group 4 and 5 of the Periodic Table (IUPAC new nomenclature) and the newer metallocene catalysts based on Group 4 - 6 metals. However specific late transition metal catalysts suitable for
15 olefin polymerization had not offered the same levels of activity or molecular weight capability for olefin polymerization during the development of these catalyst systems and additional work was published addressing this lack.

 In Johnson, Killian, and Brookhart, *J. Am. Chem. Soc.*, 1995, 117, 6414 the authors describe the use of Ni and Pd complexes for the solution homopolymerization of ethylene,
20 propylene, and 1-hexene. The catalyst precursors are square-planar, M^{2+} , d^8 , 16 electron complexes incorporating substituted, bidentate diimine ligands. The active coordination sites are occupied by either methyl or bromide ligands. Methyl ligand complexes were activated with $H^+(OEt_2)_2[B(3,5-(CF_3)_2C_6H_3)_4]^-$ and bromide ligand complexes were activated with methylalumoxane (MAO) or diethylaluminumchloride as cocatalysts.

25 European patent publication EP-A2-0 454 231 describes Group VIIIb metal catalysts said to be suitable for the polymerization of ethylene, α -olefins, diolefins, functionalized olefins, and alkynes. The described catalyst precursors are Group VIIIb metal (Groups 8, 9, 10, IUPAC new nomenclature) compounds which are subsequently activated by compounds
30 including discrete borate anions. Ethylene homopolymerization in solutions of methylene chloride, toluene and diethyl ether are illustrated. Few polymerizations were conducted in the presence of a support material and broad molecular weight distribution polymers were produced.

35 The advantages recognized with the early transition metal catalysts of immobilizing the catalyst on solid supports to enable heterogeneous polymerization processes such as those based on gas phase, bulk or slurry processes would be important to effect efficient industrial utilization of the late transition metal catalysts described, and derivatives of them.

In particular, due to the observed high levels of branching with the catalysts of the above literature, melting points of the resulting polymers were anticipated to be so low as to present problems with reactor operation at typical industrial operating temperatures occurring when heat dissipation by solvents is unavailable, as in continuous gas phase polymerization.

SUMMARY OF THE INVENTION

The invention encompasses late transition metal catalyst systems immobilized on solid supports and their use in heterogenous polymerization processes, particularly in gas phase polymerization of olefin monomers. Preferred embodiments include a late transition metal catalyst system comprising a Group 9, 10, or 11 metal complex stabilized by a bidentate ligand structure immobilized on a solid porous metal oxide, metalloid oxide or polymeric particle support, preferably those comprising silica. The gas phase polymerization process for olefin monomers comprises contacting one or more olefins with these catalyst systems under gas phase polymerization conditions.

DETAILED DESCRIPTION OF THE INVENTION


The polymerization catalysts of this invention can be derived from the late transition metal compounds of formula:



wherein M is a Group 9, 10, or 11 metal, preferably a first row metal, also preferably a d^6 , d^8 or d^{10} metal, most preferably d^8 ; L is a bidentate ligand that stabilizes a square planar geometry and charge balances the oxidation state of MX_r ; each X is, independently, a hydride radical, a hydrocarbyl radical, a substituted hydrocarbyl radical, a halocarbyl radical, a substituted halocarbyl radical, and hydrocarbyl- and halocarbyl-substituted organometalloid radicals; or two X's are joined and bound to the metal atom to form a metallacycle ring containing from about 2 to about 20 carbon atoms; or one or more X can be a neutral hydrocarbyl containing donor ligand, e.g., an olefin, diolefin, or aryne ligand; and $r = 0, 1, 2$, or 3. When Lewis-acid activators, such as methylalumoxane, aluminum alkyls, or alkylaluminum halides, which are capable of donating an X ligand, as described above, to the transition metal component, are used, or when the ionic activator is capable of extracting X, one or more X may additionally be independently selected from the group consisting of a halogen, alkoxide, aryloxy, amide, phosphide or

other univalent anionic ligand; two such X's joined to form an anionic chelating ligand; or, one or more neutral non-hydrocarbyl atom containing donor ligand, e.g., phosphine, amine, nitrile or CO ligand.




- 5 In a preferred embodiment of the invention, the bidentate ligand, L, is defined by the following formula:



- 10 wherein A is a bridging group containing a Group 13-15 element; each E is independently a Group 15 or 16 element covalently bonded to M; each R is independently a C₁-C₃₀ containing radical or diradical group which is a hydrocarbyl, substituted-hydrocarbyl, halocarbyl, substituted-halocarbyl, hydrocarbyl-substituted organometalloid, halocarbyl-substituted organometalloid, m and n are independently 1 or 2 depending on the valency of E; and p is the charge on the bidentate ligand such that the oxidation of state of MX_r is
15 satisfied.

In the most preferred embodiment of the invention, the bridging group, A, is defined by the following formulae:

20

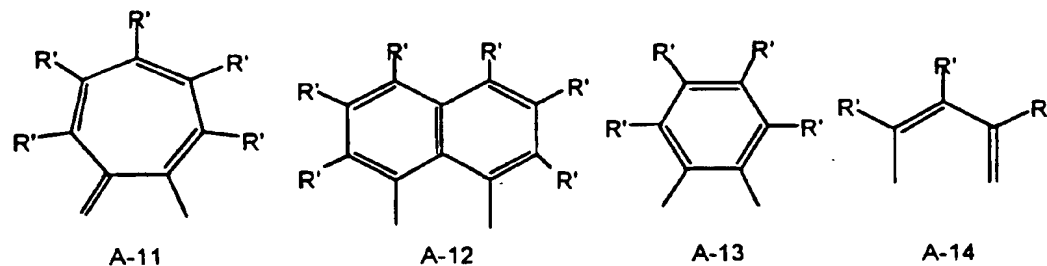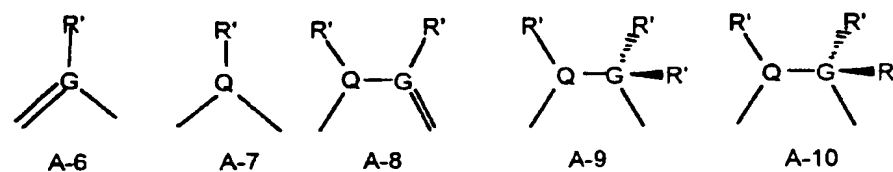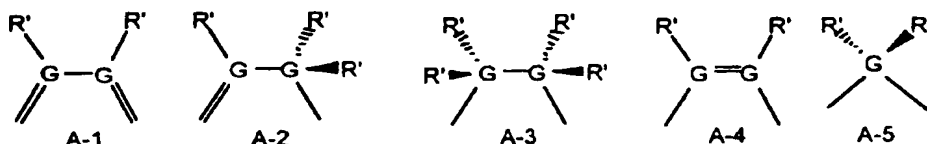

25

wherein G is a Group 14 element especially C, Si, and Ge; Q is a Group 13 element especially B and Al; and R' are independently hydride radicals, C₁-C₃₀ hydrocarbyl radicals, substituted hydrocarbyl radicals, halocarbyl radicals, substituted halocarbyl radicals, and hydrocarbyl- and halocarbyl-substituted organometalloid radicals, and optionally two or more adjacent R' may form one or more C₄ to C₄₀ rings to give a saturated or unsaturated cyclic or polycyclic ring.

Also in the most preferred embodiment of the invention, each R is independently a bulky C₁-C₃₀ containing radical group which is a hydrocarbyl, substituted-hydrocarbyl, halocarbyl, substituted-halocarbyl, substituted organometalloid, hydrocarbyl-substituted organometalloid, or halocarbyl-substituted organometalloid. Bulky radical groups include phenyls, substituted phenyls, alkyls and substituted alkyls bonded to E through a tertiary carbon atom, alicyclic and polyalicyclic containing hydrocarbyls, particularly those bonded to E through a tertiary carbon and the like.

In the definitions above, the term "substituted" is as defined or refers to C₁-C₃₀ containing radicals which are to be essentially hydrocarbyl, but may include one or more non-hydrocarbyl atoms (such as Si, Ge, O, S, N, P, halogen, etc.) in place of one or more carbon atoms.

In the very most preferred embodiment of this invention, M is a group 10 metal, E is a group 15 element especially nitrogen with m and n being one and p being zero, the bridge is as drawn in A-1, and R is a substituted phenyl group preferably substituted in at least the 2 and 6 positions with non-hydride R' groups. For high molecular weight polymers, R' is preferably C₃-C₃₀, preferably with a secondary or tertiary carbon atom bonded to the phenyl group.

For the purposes of this patent specification, the terms "cocatalysts or activators" are used interchangeably and are defined to be any compound or component which can activate the late transition metal compound.

The late transition metal catalyst compounds according to the invention may be activated into the invention catalyst complexes for polymerization catalysis in any manner sufficient to allow coordination polymerization. This can be achieved, for example, when one X ligand can be abstracted and the other X will either allow insertion of the unsaturated monomers or will be similarly abstractable for replacement with an X that allows insertion of the unsaturated monomer. Traditional organometallic compound Ziegler cocatalysts may be


utilized. Additionally, the traditional activators of metallocene polymerization art are suitable activators; those typically include Lewis acids such as alumoxane compounds, and ionizing, anion pre-cursor compounds that abstract one X so as to ionize the transition metal center into a cation and provide a counterbalancing, compatible, noncoordinating anion.

5

In general, the late transition metal compound may be activated with an alumoxane, Ziegler cocatalyst, "noncoordinating anion" precursor compounds and halide salts of the Group 13-16 metals each of which is described more fully below.


10 The Ziegler cocatalyst will typically be a organometallic compound of a metal of Groups 1, 2, 12 or 13 of the Periodic table of elements. Preferred are organoaluminum compounds selected from the group consisting of aluminum alkyl, aluminum alkyl halide and aluminum halide. These can be represented by the formulae :

15



wherein R^1 is independently a hydride or C_1 to C_{10} hydrocarbyl radicals including aliphatic, alicyclic or aromatic hydrocarbon radical, X' is a halogen and s is an integer from 0 to 3; and,

20



which are hydrocarbylaluminum sesquihalides.

Examples include triethylaluminum, triisobutylaluminum, diethyl aluminum chloride, $\text{Al}_2\text{Et}_3\text{Cl}_3$ and $\text{Al}_2(\text{i-Bu})_3\text{Cl}_3$.

25

Alkylalumoxanes and modified alkylalumoxanes are suitable as catalyst activators. The alumoxane component useful as catalyst activator typically is an oligomeric aluminum compound represented by the general formula $(\text{R}^2\text{-Al-O})_n$, which is a cyclic compound, or $\text{R}^2(\text{R}^2\text{-Al-O})_n\text{AlR}^2_2$, which is a linear compound. In the general alumoxane formula R^2 is independently a C_1 to C_{10} hydrocarbyl radical, for example, methyl, ethyl, propyl, butyl or pentyl and "n" is an integer from 1 to about 100. Most preferably, R^2 is methyl and "n" is at least 4. Alumoxanes can be prepared by various procedures known in the art. For example, an aluminum alkyl may be treated with water dissolved in an inert organic solvent, or it may be contacted with a hydrated salt, such as hydrated copper sulfate suspended in an inert organic solvent, to yield an alumoxane. Generally, however prepared, the reaction of an aluminum alkyl with a limited amount of water yields a mixture of the linear and cyclic species of the alumoxane. Methylalumoxane and modified methylalumoxanes are preferred. For further descriptions see, U.S. Patent Nos. 4,665,208, 4,952,540, 5,041,584, 5,091,352,

35

5,206,199, 5,204,419, 4,874,734, 4,924,018, 4,908,463, 4,968,827, 5,329,032, 5,248,801, 5,235,081, 5,157,137, 5,103,031 and EP 0 561 476 A1, EP 0 279 586 131, EP 0 516 476 A, EP 0 594 218 A1 and WO 94/10180, each being incorporated by reference for purposes of U.S. patent practice.

5

For the immobilized catalyst systems of the invention when the activator is an alumoxane, the preferred transition metal compound to activator molar ratio is from 1:500 to 10:1, more preferably from about 1:200 to 10:1, even more preferably from about 1:120 to 1:1.

10

The term "noncoordinating anion" as used for the ionizing, anion pre-cursor compounds ("noncoordinating anion precursors") is recognized to mean an anion which either does not coordinate to said transition metal cation or which is only weakly coordinated to said cation thereby remaining sufficiently labile to be displaced by a neutral Lewis base. "Compatible" noncoordinating anions are those which are not degraded to neutrality when the initially formed complex between the late-transition-metal catalyst compounds and the ionizing, anion pre-cursor compounds decomposes. Further, the anion will not transfer an anionic substituent or fragment to the cation so as to cause it to form a neutral four coordinate metal compound and a neutral by-product from the anion. Noncoordinating anions useful in accordance with this invention are those which are compatible, stabilize the late-transition-metal cation in the sense of balancing its ionic charge, yet retain sufficient lability to permit displacement by an olefinically unsaturated monomer during polymerization. Additionally, the anions useful in this invention will be of sufficient molecular size to partially inhibit or help to prevent neutralization of the late-transition-metal cation by Lewis bases other than the polymerizable monomers that may be present in the polymerization process.

25

Descriptions of ionic catalysts, those comprising a transition metal cation and a noncoordinating anion, suitable for coordination polymerization appear in the early work in U.S. patents 5,064,802, 5,132,380, 5,198,401, 5,278,119, 5,321,106, 5,347,024, 5,408,017, WO 92/00333 and WO 93/14132. These teach a preferred method of preparation wherein metallocenes are protonated by an anion precursor such that an alkyl/hydride group is abstracted from a transition metal to make it both cationic and charge-balanced by the noncoordinating anion. These teachings are useful to those skilled in the art for the late-transition-metal catalysts of the present invention

35

The use of ionizing ionic compounds not containing an active proton but capable of producing both the active metal cation and a noncoordinating anion is also known. See, EP-A-0 426 637, EP-A-0 573 403 and U.S. patent 5,387,568. Reactive cations other than the

Brönsted acids include ferricenium, silver, tropylium, triphenylcarbenium and triethylsilylium, or alkali metal or alkaline earth metal cations such as sodium, magnesium or lithium cations. A further class of noncoordinating anion precursors suitable in accordance with this invention are hydrated salts comprising the alkali metal or alkaline earth metal cations and a
5 noncoordinating anion as described above. The hydrated salts can be prepared by reaction of the metal cation-noncoordinating anion salt with water, for example, by hydrolysis of the commercially available or readily synthesized $\text{LiB}(\text{pfp})_4$ which yields $[\text{Li} \cdot x\text{H}_2\text{O}] [\text{B}(\text{pfp})_4]$, where (pfp) is pentafluorophenyl or perfluorophenyl.

10 Any metal or metalloid capable of forming a coordination complex, which preferably is resistant to degradation by water (or other Brönsted or Lewis Acids), may be used or contained in the anion. Suitable metals include, but are not limited to, aluminum, gold, platinum and the like. Suitable metalloids include, but are not limited to, boron, phosphorus, silicon and the like. The description of noncoordinating anions and precursors thereto of the
15 documents of the foregoing paragraphs are incorporated by reference for purposes of U.S. patent practice.

An additional method of making the ionic catalysts uses noncoordinating anion precursors which are initially neutral Lewis acids but form the cation and anion upon ionizing
20 reaction with the late transition metal compounds, for example tris(pentafluorophenyl) boron acts to abstract a hydrocarbyl, hydride or silyl ligand to yield a late-transition-metal cation and stabilizing noncoordinating anion; see EP-A-0 427 697 and EP-A-0 520 732 which are directed to metallocene catalyst systems. Ionic catalysts for coordination polymerization can also be prepared by oxidation of the metal centers of transition metal compounds by anionic
25 precursors containing metallic oxidizing groups along with the anion groups, see EP-A-0 495 375. The description of noncoordinating anions and precursors thereto of these documents are similarly incorporated by reference for purposes of U.S. patent practice.

When the cation portion of an ionic noncoordinating precursor is a Brönsted acid such
30 as protons or protonated Lewis bases, or a reducible Lewis acid such as ferricenium or silver cations, or alkali metal or alkaline earth metal cations such as those of sodium, magnesium or lithium cations, the transition metal to activator molar ratio may be any ratio, but preferably from about 10:1 to 1:10; more preferably from about 5:1 to 1:5; even more preferably from about 2:1 to 1:2; and most preferably from about 1.2:1 to 1:1.2 with the ratio of about 1:1
35 being the most preferred. Similar ratios may be used for other noncoordinating anion precursor compounds.

The late transition metal catalyst compounds of this invention may also be activated with ionizing anion precursors including the halide salts of Group 13 -16 metals or metalloids, preferably the fluoride and oxyfluoride salts, e.g., those providing the following anions: BF_4^- , PF_6^- , SbF_6^- , TeOF_6^- and AsF_6^- .

5

When halide salts of Group 13-16 metals or metalloids are used as the activator, the preferred total transition metal compound to activator molar ratio is preferably from 10:1 to 1:10, more preferably from about 5:1 to 1:5, even more preferably from 2:1 to 1:2, and even more preferably from 1.2:1 to 1:1.2 with 1:1 being most preferred. Higher and lower ratios may also be used.

10

When using ionic catalysts of the late transition metal complexes comprising cations and noncoordinating anions, the total catalyst system can additionally comprise one or more scavenging compounds. The term "scavenging compounds" is meant to include those compounds effective for removing polar impurities from the reaction environment. Impurities can be inadvertently introduced with any of the polymerization reaction components, particularly with solvent, monomer and catalyst feed, and adversely affect catalyst activity and stability. Impurities can result in decreased, variable or even elimination of catalytic activity. The polar impurities, or catalyst poisons include water, oxygen, metal impurities, etc. While the late transition metal catalysts of the present invention can be less sensitive to impurities than metallocene catalyst systems, reduction or elimination of poisons remains a viable option. Preferably steps are taken before provision of such into the reaction vessel, for example by chemical treatment or careful separation techniques after or during the synthesis or preparation of the various components; some minor amounts of scavenging compound can still normally be used in the polymerization process itself.

15

20

25

Typically the scavenging compound will be an organometallic compound such as the Group 13 organometallic compounds of U.S. patents 5,153,157, 5,241,025 and WO-A-91/09882, WO-A-94/03506, WO-A-93/14132, and that of WO 95/07941. Exemplary compounds include triethyl aluminum, triethyl borane, triisobutyl aluminum, methylalumoxane, isobutyl aluminoxane, and n-octyl aluminum. Those scavenging compounds having bulky or C₈-C₂₀ linear hydrocarbyl substituents covalently bound to the metal or metalloid center being preferred to minimize adverse interaction with the active catalyst. When alumoxane or Zeigler co-catalyst is used as activator, any excess over the amount of late-transition-metal present will act as scavenger compounds and additional scavenging compounds may not be necessary. The amount of scavenging agent to be used with late-transition-metal cation-noncoordinating anion pairs is minimized during polymerization reactions to that amount effective to enhance activity.

30

35

The catalyst systems of this invention can additionally be prepared by combining in any order the bidentate ligand L, or a known precursor to it, with a suitable late transition metal complex, and an activator compound. For example, the bidentate ligand L precursor
5 (2,6-*i*-Pr₂C₆H₃N=CH)₂ may be added to the late transition metal complex NiBr₂•MeOCH₂CH₂OMe in a solvent such as toluene having the activator compound methylalumoxane dissolved therein. Optionally, oxidizing or reducing agents may be used additionally to achieve the preferred d⁶, d⁸ or d¹⁰ metal compounds. All reactants may be added in any order, or even essentially simultaneously.

10

The supported catalyst can be prepared in an appropriate solvent which may be any of aliphatic or aromatic hydrocarbon solvents, halocarbon solvents such as methylene chloride and difluorobenzene, or may be polar or protic solvents such as water. The halocarbon or polar solvents are preferred when the late transition metal compounds, LMX_r,
15 are not soluble in hydrocarbon solvents. Typically the aromatic hydrocarbon solvents are more suitable than the aliphatic solvents for dissolving the late transition metal compound. Further, the aromatic hydrocarbon solvents can be used for late transition metal compounds having limited solubility in those solvents when the metal compounds have been solubilized with a suitable activator, for example, as with activation by methylalumoxane in an aromatic
20 solvent. Significant dissolution of the metal compounds is important for the preparation of homogeneous, supported catalysts. The term "homogeneous, supported catalysts" means that the metal compounds, or their activated complexes, approach even distribution upon the accessible surface area of the support, including interior pore surfaces in the preferred porous supports.

25

The immobilized catalyst systems of the invention may be prepared by any effective method of supporting other coordination catalyst systems, effective meaning that the catalyst so prepared can be used for preparing polymer in a heterogeneous polymerization process. Preferred methods include those referred to in copending U.S. application 08/466,547, filed
30 6 June 1995, and in its counterpart WO 96/00245. In accordance with this method, as illustrated in the examples below, the late transition metal compound is combined with an activator compound in solvent to prepare a precursor solution which is added to a porous support particle in such a manner that the total solvent volume exceeds the total particle pore volume but is less than that at which the formation of a slurry is observed.

35

Another preferred method of immobilizing the catalyst systems of the invention are described in co-pending U.S. application serial no. 08/474,948, filed 6/7/95, published as WO 96/04319. In this method ionic catalyst systems chemically bound to the support are

prepared. A neutral Lewis acid ionizing compound (such as tris(perfluorophenyl)boron) is reacted with hydroxyl group-containing metal oxide supports, preferably complexed with a Lewis base, and then reacted with the transition metal precursor compound which is activated by protonation. The late transition metal activated complex is then ionically
5 balanced by the noncoordinating anion chemically bound to the support.

The activated catalyst may also be supported in accordance with WO 91/0882 and WO 94/03506, particularly when using ionizing activators providing electronically stabilizing noncoordinating anions. In this method, inorganic oxide particle supports are treated with a
10 Lewis acid to neutralize any hydroxyl groups remaining on the surfaces after thorough drying and prior to the adsorption of the activated catalyst complex from the solution in which it is added.

The support method of Example 11-16 in copending U.S. application Ser. No. 08/549,991, filed 30 October 1995, and in WO 96/08520 will also be suitable in accordance
15 with this invention.

Additional methods appear in the following descriptions for metallocene catalysts, these methods will be suitable as well for the invention catalyst systems. U.S. Patent No. 4,937,217 generally describes a mixture of trimethylaluminum and triethylaluminum added to an undehydrated silica to which a metallocene catalyst component is then added. EP-308177-B1 generally describes adding a wet monomer to a reactor containing a metallocene, trialkylaluminum and undehydrated silica. U.S. Patent Nos. 4,912,075, 4,935,397 and 4,937,301 generally relate to adding trimethylaluminum to an undehydrated silica and then
20 adding a metallocene to form a dry supported catalyst system. U.S. Patent No. 4,914,253 describes adding trimethylaluminum to undehydrated silica, adding a metallocene and then drying the resulting supported catalyst system with an amount of hydrogen to produce a polyethylene wax. U.S. Patent Nos. 5,008,228, 5,086,025 and 5,147,949 generally describe forming a dry supported catalyst system by the addition of trimethylaluminum to a water impregnated silica to form alumoxane in situ and then adding the metallocene. U.S. Patent
30 Nos. 4,808,561, 4,897,455 and 4,701,432 describe techniques to form a supported catalyst where the inert carrier, typically silica, is calcined and contacted with a metallocene(s) and an activator/cocatalyst component. U.S. Patent No. 5,238,892 describes forming a dry supported catalyst system by mixing a metallocene with an alkyl aluminum and then adding undehydrated silica. U.S. Patent No. 5,240,894 generally pertains to forming a supported metallocene/alumoxane catalyst system by forming a metallocene/alumoxane reaction solution, adding a porous carrier, and evaporating the resulting slurry to remove essentially
35 all residual solvent from the carrier.

Polymeric carriers will also be suitable in accordance with the invention, see for example the descriptions in WO 95/15815 and U.S. patent 5,427,991. As taught for metallocene catalysts in these documents, the catalyst complexes of this invention may be
5 either adsorbed or absorbed, on the polymeric supports, particularly if made up of porous particles, or may be chemically bound through functional groups covalently bound to or in the polymer chains.

Suitable solid particle supports are typically comprised of polymeric or refractory
10 oxide materials, each being preferably porous, such as for example, talc, inorganic oxides, inorganic chlorides, for example magnesium chloride, and resinous support materials such as polystyrene polyolefin or polymeric compounds or any other organic support material and the like that has an average particle size preferably greater than 10 μm .

The preferred support materials are inorganic oxide materials, which include those from the Periodic Table of Elements of Groups 2, 3, 4, 5, 13 or 14 metal or metalloid oxides. In a preferred embodiment, the catalyst support materials include silica, alumina, silica-alumina, and mixtures thereof. Other inorganic oxides that may be employed either alone or
15 in combination with the silica, alumina or silica-alumina are magnesia, titania, zirconia, and the like.
20

It is preferred that the carrier of the catalyst of this invention has a surface area in the range of from about 10 to about 700 m^2/g , pore volume in the range of from about 0.1 to about 4.0 cc/g and average particle size in the range of from about 10 to about 500 μm .
25 More preferably, the surface area is in the range of from about 50 to about 500 m^2/g , pore volume of from about 0.5 to about 3.5 cc/g and average particle size of from about 20 to about 200 μm . Most preferably the surface area range is from about 100 to about 400 m^2/g , pore volume from about 0.8 to about 3.0 cc/g and average particle size is from about 30 to about 100 μm . The pore size of the carrier of the invention typically has pore size in the
30 range of from 10 to 1000 \AA , preferably 50 to about 500 \AA , and most preferably 75 to about 350 \AA .

The catalysts of this invention are generally deposited on the support at a loading level of 100 to 10 micromoles of transition metal compound to gram of solid support; more
35 preferably from 80 to 20 micromoles of transition metal compound to gram of solid support; and most preferably from 60 to 40 micromoles of transition metal compound to gram of solid support. While the catalyst can be deposited on the support at any level up to the pore volume of the support, loading levels of less than 100 micromoles of transition metal

compound to gram of solid support are preferred, with less than 80 micromoles of transition metal compound to gram of solid support being even more preferred, and less than 60 micromoles of transition metal compound to gram of solid support being most preferred.

5 Gas phase processes use supported catalysts and are conducted under gas phase conditions suitable for ethylene homopolymers or copolymers prepared by coordination polymerization. Illustrative examples may be found in U.S. patents 4,543,399, 4,588,790, 5,028,670, 5,352,749, 5,382,638, 5,405,922, 5,422,999, 5,436,304, 5,453,471, and 5,463,999, and International applications WO 94/28032, WO 95/07942 and WO 96/00245.
10 Each is incorporated by reference for purposes of U.S. patent practice. Typically the processes are conducted at temperatures of from about -100 °C to 150 °C, preferably from about 40 °C to 120°C, at pressures up to about 7000 kPa, typically from about 690 kPa to 2415 kPa. Continuous processes using fluidized beds and recycle streams as the fluidizing medium are preferred.

15 Slurry polymerization processes, including loop slurry, in which the immobilized catalyst systems of this invention may be used are typically described as those in which the polymerization medium can be either a liquid monomer, like propylene, or a hydrocarbon solvent or diluent, advantageously aliphatic paraffin such as propane, isobutane, hexane,
20 heptane, cyclohexane, etc. or an aromatic one such as toluene. The polymerization temperatures may be those considered low, e.g., less than 50 °C, preferably 0 - 30 °C, or may be in a higher range, such as up to about 150 °C, preferably from 50 °C up to about 80 °C, or at any ranges between the end points indicated. Pressures can vary from about 100 to about 700 psia (0.76-4.8 MPa). Additional description is given in U.S. patents 5,274,056
25 and 4,182,810 and WO 94/21962 which are incorporated by reference for purposes of U.S. patent practice. Preferably for both gas phase and slurry process the polymerization reaction temperatures will be maintained at a temperature at least 10°C below the melting point of the polymer being produced.

30 In the process manner discussed above with the invention catalysts described in this application, unsaturated monomers, that is olefinically or ethylenically unsaturated monomers, may be polymerized so as to form polymer products having molecular weights (weight-average or M_w) from about 500 to about 3×10^6 . Most typically, the polymer products will have an M_w of from about 1000 to about 1.0×10^6 and will have narrow
35 molecular weight distribution from about 1.9 - 4.0. Suitable unsaturated monomers will include ethylene, C_3 - C_{20} α -olefins, C_4 - C_{20} cyclic olefins, C_4 - C_{20} non-conjugated diolefins, C_4 - C_{20} gem-substituted olefins, or C_{20} - C_{1000} α -olefin macromers, and C_8 - C_{20} aromatic substituted olefins. Preferably the polymer products will be any of polyethylene

homopolymers, ethylene copolymers, particularly polyethylene plastomers and elastomers. And, in view of the known tolerance of the catalysts to polar monomers, ethylenically unsaturated polar monomers will additionally be polymerizable or copolymerizable. The preferred polar monomers include C₄-C₂₀ olefins containing functional groupings such as
5 esters, carboxylates, nitriles, amines, amides, alcohols, halides carboxylic acids and the like. More preferably vinyl esters, halides and nitriles. Also, the masked monomers of U.S. Patent 4,987,200 are also suitable.

10 Preferred polymer products enabled through the practice of this invention can have unexpected higher melting points than polymers from similar unsupported catalyst complexes when used in solution polymerization processes. Thus polymers with melting points of at least 125°C will be possible despite the branch-producing tendencies of these late transition metal complexes.

15 Another important characteristic of the polymer of the invention is its composition distribution (CD). A measure of composition distribution is the "Composition Distribution Breadth Index" ("CDBI"). CDBI is defined as the weight percent of the copolymer molecules having a comonomer content within 50% (that is, 25% on each side) of the median total molar comonomer content. The CDBI of a copolymer is readily determined
20 utilizing well known techniques for isolating individual fractions of a sample of the copolymer. One such technique is Temperature Rising Elution Fraction (TREF), as described in Wild, et al., J. Poly. Sci., Poly. Phys. Ed., vol. 20, p. 441 (1982) and U.S. Patent No. 5,008,204, which are incorporated herein by reference.

25 To determine CDBI, a solubility distribution curve is first generated for the copolymer. This may be accomplished using data acquired from the TREF technique described above. This solubility distribution curve is a plot of the weight fraction of the copolymer that is solubilized as a function of temperature. This is converted to a weight fraction versus composition distribution curve. For the purpose of simplifying the correlation
30 of composition with elution temperature the weight fractions are assumed to have a $M_n \geq 15,000$, where M_n is the number average molecular weight fraction. Low weight fractions generally represent a trivial portion of the polymer of the present invention. The remainder of this description and the appended claims maintain this convention of assuming all weight fractions have a $M_n \geq 15,000$ in the CDBI measurement.

35

From the weight fraction versus composition distribution curve the CDBI is determined by establishing what weight percent of the sample has a comonomer content within 25% of each side of the median comonomer content. Further details of determining

the CDBI of a copolymer are known to those skilled in the art. See, for example, PCT Patent Application WO 93/03093, published February 18, 1993.

5 The polymers of the present invention in one embodiment have CDBI's generally in the range of greater than 50% to 99%, preferably in the range of 50% to 85%, and more preferably 55% to 80%, even more preferably greater than 60%, still even more preferably greater than 65%. Obviously, higher or lower CDBI's may be obtained using other catalyst systems with changes in the operating conditions of the process employed.

10 For the following examples, all molecular weights are weight average molecular weight unless otherwise noted. Molecular weights (weight average molecular weight (M_w) and number average molecular weight (M_n) were measured by Gel Permeation Chromatography, unless otherwise noted, using a Waters 150 Gel Permeation Chromatograph equipped with a differential refractive index detector and calibrated using
15 polystyrene standards. Samples were run in either THF (45°C) or in 1,2,4-trichlorobenzene (145°C) depending upon the sample's solubility using three Shodex GPC AT-80 M/S columns in series. This general technique is discussed in "Liquid Chromatography of Polymers and Related Materials III" J. Cazes Ed., Marcel Decker, 1981, page 207, which is incorporated by reference for purposes of U.S. patent practice herein. No corrections for
20 column spreading were employed; however, data on generally accepted standards, e.g. National Bureau of Standards Polyethylene 1475, demonstrated a precision with 0.1 units for M_w/M_n which was calculated from elution times. The numerical analyses were performed using Expert Ease⁺ software available from Waters Corporation.



25

EXAMPLES

Preparation of Supported Catalysts

30 Transition metal precursors used to illustrate the invention were those described in Table I.

Table I. Transition Metal Precursor Structures.

Structure			$(C_5Me_5)_2ZrCl_2$	$(C_5H_5)_2ZrCl_2$
Designation	TM-1, X = Cl TM-2, X = Br TM-3, X = Me	TM-4	TM-5	TM-6

5

Example 1**General Supporting Method**

An aluminoxane, such as methylalumoxane or modified alumoxane, or other suitable activator such as $Al(CH_3)_3$, $Al(CH_2CH_3)_2Cl$, $B(C_6F_5)_3$, $[C_6H_5NMe_2H]^+[B(C_6F_5)_4]^-$, $[(C_6H_5)_3C]^+[B(C_6F_5)_4]^-$, $[H]^+[BF_4]^-$, $[H]^+[PF_6]^-$, $[Ag]^+[BF_4]^-$, $[Ag]^+[PF_6]^-$, or $[Ag]^+[B(C_6F_5)_4]^-$ is combined with one or more transition metal complexes in an appropriate solvent to form a precursor solution. A suitable support, preferably porous, is charged to a vessel and the precursor solution is added with stirring. The mixture may be mixed by hand with a spatula, by a rotating stirrer with wire loops such as a Kitchen Aid dough mixer, by metal blades rotating at high speed such as in a Wehring blender, by a helical ribbon bladed mixer, by shaking, tumbling, fluidized bed mixing, by paddle or propeller blades on a rotating stir shaft, or other appropriate means. The total amount of solvent used to form the precursor suspension or solution may be less than the pore volume of the support as in impregnation to incipient wetness, or greater than the pore volume of the support such that a slurry is formed, or an amount in between such that a solution-finely divided support mixture is neither free flowing nor a slurry. Solution may be added to support or vice versa as appropriate to the mixing method. If desired the liquids may be removed by purging with an inert gas or under vacuum.

20

Support Method

An aluminoxane or suitable activator was combined with the transition metal complexes in toluene to form a precursor solution. The solution was charged to a vessel and the porous support added all at once and the mixture stirred by hand with a spatula. The total volume of the precursor solution was greater than the pore volume of the support, but not enough to reach the point of gelation or form a slurry, about 100%- 200% pore volume. The solvent was removed in vacuo (press. < 200 mTorr) and ambient temperature overnight, about 12 - 16 hr.

The aluminoxane used was 30 wt% methyl aluminoxane supplied in toluene by Albemarle. The silica was MS948 (1.6 cc/g P.V. (P.V. = Pore Volume), Davison Chemical Co) previously heated at 600°C under N₂ for 3 hours, and the toluene was air and moisture free from Exxon Chemical.

Table II. Supported Catalyst Preparation Data.

Ex.	Method	TM used	TM (mg)	TM (μmol)	MAO (g)	Tol. (g)	SiO ₂ (g)	TM μmol/g support	P.V. soln.*
S-1	1	TM-1	88	165	3.9	1.8	3.0	55	1.3
S-2	1	TM-2	106	170	3.9	1.8	3.0	57	1.3
S-3	1	TM-4	118	164	3.9	1.8	3.0	55	1.3
S-4	1	TM-4	1200	1668	38.1	38.9	30.0	56	1.7
S-5	1	TM-4	1204	1674	38.1	38.9	30.0	56	1.7

*P.V. soln. = Ratio of total precursor solution volume to support Pore Volume (cc/g).

Polymerization Reaction Examples**Polymerization Method 1: Continuous Fluidized Bed Gas Phase Polymerizations**

Under conditions described in copending U.S. application 08/466,547, filed 6 June 1995, and in WO 96/00245, a continuous cycle fluidized bed gas phase polymerization reactor was used for the ethylene polymerization studies summarized in Tables III and IV. The approximate dimensions of the reactor section above the distributor plate and below the disengaging head were 4 in. (10.2 cm.) in diameter and 24 in. (61 cm.) in length. Total operating pressure was 314.7 psia (2170 kPa) (gas compositional makeup described in Table III with the balance being N₂) and polymer samples were collected after several bed

turnovers. Detailed process descriptions are given in Table III and product characterization data in Table IV.

Table III. Polymerization Method 1 Process Conditions.

Example	Catalyst	C ₂ mol%	H ₂ /C ₂ ¹	°C	Bed Turnovers ²	g PE/g Cat
P1-1	S-4	60.4	0.1	39.2	2.7	228
P1-2	"	62.1	1.4	41.6	5.0	344
P1-3	S-5	69.4	14.6	43.5	2.8	343
P1-4	"	70.2	14.8	54.5	4.1	367
P1-5	"	70.4	19.8	63.0	3.1	296

¹ mol ppm H₂/mol%C

² Number of times the starting polymer bed displaced.

³ Productivity based upon material balance of catalyst fed into reactor and polymer removed.

Table IV. Polymerization Method 1 Product Data.

Ex.	Catalyst	Density	Melt Index ¹	MP °C ²	Branch ¹ H NMR ³	M _w ⁴ (10 ⁻³)	MWD
P1-1	S-4	0.9107	no flow	117.2	18.4	564	2.77
P1-2	"	0.9105	no flow	nm	20.4	665	2.70
P1-3	S-5	0.9103	no flow	118.86	19.6	590	2.80
P1-4	"	0.9061	no flow	115.9	26.5	525	2.86
P1-5	"	0.9013	no flow	91.0, 114.4	33.6	435	2.68

¹ No significant flow under standard ASTM melt indexes conditions.

² Peak melting temperatures by DSC.

³ Methyl groups per 1000 carbons

⁴ Samples showed some mass loss during GPC analysis.

Polymerization Method 2: Semi Batch Slurry Polymerizations

Conditions of the polymerization examples are given in Table V. Polymerizations were performed in 400 mL of dry hexane in a nitrogen purged 1 L Zipperclave reactor (Autoclave Engineers) equipped with an external temperature control jacket. In a glove box

a charge of the supported catalyst, usually 50 to 200 mg, was loaded into a short length of SS tubing between two ball valves and backed by a small bomb containing 20 mL dry hexane. This device was attached to the reactor under an N₂ purge. Unless noted otherwise, cocatalyst (0.200 mL 25 wt% triethylaluminum in heptane) was injected into the reactor as well as comonomer, if noted, and the mixture heated to operating temperature with stirring. Stirring was stopped and the catalyst flushed into the reactor by the hexane backed with ethylene or nitrogen pressure. Stirring was immediately restarted while the reactor reached its regulated operating pressure corrected for solvent vapor pressure.

After sufficient reaction occurred the reactor was vented and the contents slowly poured into a beaker with 1 L of stirred acetone under air and filtered. Alternately the solvent could be removed under vacuum or by an impinging nitrogen stream. The separated polymer samples were then dried overnight in a vacuum drying oven at about 50 °C.

Comparative Polymerization Method 3: Semi Batch Solution/Suspension Polymerizations

Conditions of the polymerization examples are given in Table V. Polymerizations were performed as in Method 2 with the following exceptions. No triethylaluminum was used. Instead 10 wt% methylaluminoxane in toluene from Witco was introduced into the reactor as both scavenger and activator. The transition metal compounds were introduced into the reactor as solutions in toluene.

Comparative Polymerization Method 4: Semi Batch Polymerization in Toluene

This is a method of the comparative examples (C1-C3) disclosed in Brookhart, et al, *supra*.

Comparative Polymerization Method 5: Semi Batch Solution/Suspension Polymerization

Conditions of the polymerization examples are given in Table V. Polymerizations were performed as in Method 3 with the following exception: toluene was used as the polymerization solvent.

Table V. Batch Slurry and Solution Polymerization Data (Methods 2- 4).

Ex	Cat.	Method	C ₂ ¹ psia	°C	min	Cat mg ¹	TM μmol	activ. μmol	Ratio activ. to TM ² (Al/M)	Yield g	Ratio g PE to g cat. ³	C ₆ ¹ mL
C-1	TM-4	4	14.7	0	30	-	0.83	1532	1837	2.2	3667	0
C-2	TM-4	4	58.8	0	30	-	0.83	1532	1837	2.1	3500	0
C-3	TM-4	4	14.7	25	30	-	0.83	1532	1837	1.8	3000	0
P2-1	S-2	2	75.0	60	90	200	7.93	-	116	11.6	58	0
P2-2	S-4	2	75.0	60	30	200	7.83	-	115	5.1	26	0
P2-3	S-2	2	300.0	30	30	100	3.97	-	116	4.1	41	0
P2-4	S-2	2	75.0	30	90	100	3.97	-	116	5.1	51	0
P3-1	TM-3	3	75.0	60	30	-	10.13	1532	151	19.4	3880	0
P3-2	TM-4	3	75.0	60	30	-	6.95	1532	220	30.4	6080	0
P3-3	TM-3	3	75.0	60	30	-	10.13	1532	151	12.2	2440	45
P3-4	TM-4	3	75.0	60	30	-	3.48	1532	441	6.4	2560	45
C-4	TM-2	5	80.0	60	30	-	1.00	1532	1540	6.6	10.600	0
C-5	TM-2	5	80.0	60	30	-	1.00	1532	1540	5.4	8710	0
C-6	TM-3	5	80.0	60	30	-	.99	1532	1540	4.5	9180	0
C-7	TM-3	5	80.0	60	30	-	.99	1532	1540	4.3	8780	0

C-X = Polymerization Comparative No. X; TM = transition metal; PE = polyethylene;

C₂¹ = ethylene; C₆¹ = hexene; activ. = activator.

¹Amount of supported catalyst added to reactor. ²Unless noted the activator is MAO and
³activ./TM is the ratio of Al to TM based on the Al analysis of the MAO. ³Grams poly-
ethylene per gram supported catalyst or g transition metal complex.

Table VI. Batch Slurry and Solution Polymerization Data (Methods 2 - 3).

Ex	Cat.	Method	$M_w \times 10^{-3}$	MWD	1H -NMR ¹	^{13}C -NMR ²	MP (°C)	hexene mL
C-1	TM-4	4	1600	2.4	24.0	nm ³	112	0
C-2	TM-4	4	1400	2.3	5.0	nm	122	0
C-3	TM-4	4	410	2.2	71.0	nm	39	0
P2-1	S-2	2	325	2.8	nm	74.7	nm	0
P2-2	S-4	2	76	1.9	80.1	nm	nm	0
P2-3	S-2	2	1080	2.8	nm	13.0	nm	0
P2-4	S-2	2	608	3.0	nm	59.2	nm	0
P3-1	TM-3	3	353	2.0	88.6	nm	nm	0
P3-2	TM-4	3	185	2.1	89.0	86.4	nm	0
P3-3	TM-3	3	427	2.0	97.8	nm	nm	45
P3-4	TM-4	3	207	2.1	96.9	97.4	nm	45
C-4	TM-2	5	353	2.3	80.0	-	-	0
C-5	TM-2	5	316	2.3	82.0	-	-	0
C-6	TM-3	5	374	2.3	78.0	-	-	0
C-7	TM-3	5	361	2.3	73.0	-	-	0

5 C-X = Polymerization Comparative No. X; TM = transition metal;

¹Me groups per 1000 carbons.

²Branches per 1000 carbons.

³nm = not measured

Table VII. Predicted vs. Observed Branching in Continuous Flow Fluidized Bed Gas Phase Polymerization.

Ex.	Cat	°C	psid (kPa)	Me/10 ³ C	MP °C	den- sity	
C-1	TM-4	0	14.7 (101)	24	112	-	-
C-2	TM-4	0	58.8 (405)	5	122	-	-0.431 branch/psi vs. C-1
C-3	TM-4	25	14.7 (101)	71	39		+1.88 branch/°C vs. C-1
calcu- lated	TM-4	63	222 (1531)	53	66	-	Extrapolated from C-2
Comp.*	-	-	-	83	30	-	-
P1-5	S-5	63	222 (1531)	33.6	91	.901	

5

*Commercial ethylene copolymer, Vistalon™ EP rubber 203, with 18.3 mol.% ethylene and 81.7 mol.% propylene (Exxon Chemical Co.)

From examination of Table VII and examples C-1 to C-3 reported by Brookhart, et al, supra, we observed that branching of the polymer C-1 decreased from 24 branches/1000 carbon atoms at 14.7 psia ethylene to 5 branches/1000 carbon atoms in C-2 at 58.8 psia ethylene. From this, one skilled in the art is led to believe that branching would decrease by 0.431 branches per one psid increase in pressure (0.063 branches/kPa). Similarly comparing examples C-1 and C-3 one skilled in the art is led to believe that branching would increase by 1.88 per °C of temperature increase. From these observations it would appear that upon increasing both temperature and pressure from those of example C-2 (58.8 psi (405kPa), 0 °C) to those of the typical continuous cycle fluidized bed gas phase polymerization process in example P1-5 (222 psia (1531kPa), 63 °C) the branching would increase from 5 branches/1000 carbon atoms to about 53 branches/1000 carbon atoms. By comparing branch counts vs. MP for the three examples C-1, C-2 and C-3 as well as a commercial ethylene copolymer (Vistalon™ EP Rubber 203) and the polymer obtained from the supported catalyst of example P1-5, a linear relationship is derived such that $MP = -1.275(\#Me/100^{\circ}C) + 134.038$ with $R = 0.991$. Using this equation, one would predict that a

polymer having 53 branches/1000 carbon atoms would have a MP of 66°C. This is very near the typical operating temperature of commercially viable gas phase polymerization processes and would likely result in fusion of partially melted polymer particles formed in the reactor and consequent loss of fluidization. Surprisingly, however, under the conditions examined in
5 Tables III and IV, these difficulties were not observed. Instead, the polymer produced had 34 branches 1000 carbon atoms and MP of 91°C rather than the calculated 53 branches/1000 carbon atoms and MP of 66°C. Additionally, the particle morphology observed was excellent and the production of fines was low.

10 Additionally, it was observed that the selection of a late transition metal catalyst system and its being immobilized on a solid particle support for slurry polymerization in accordance with the invention resulted in unexpected modifications in the polymer characteristics. The late transition metal catalyst system TM-4 exhibited a significant drop in M_w from 185,000 to 76,000 when run unsupported (P3-2) and supported (P2-2) while the
15 late transition metal catalyst system TM-2/TM-3 exhibited the essentially insignificant drop from 353,000 to 325,000 (P3-1 vs. P2-1) when run under similar conditions. It is likely that the conjugated groups on the bridge TM-4 are affected in some manner by being supported on the solid particle such that the M_w is decreased. Thus, selection for molecular weight tailoring can be guided by this observation, lower molecular weights can be achieved with
20 those late transition metal catalyst system compounds having the conjugated groups on the bridge (e.g., A-11 through A-14 above) when a catalyst of this class is supported and utilized in slurry or gas phase processes. In support of the comparison of the dibromide vs. dimethyl starting complex, Brookhart, in JACS '95 p. 6414 Table entries 5 & 6, shows equivalent behavior for cationic methyl complexes and the dibromide complexes plus MAO. This is
25 similarly supported by comparative examples C4-C7 of this application.

Supporting the catalysts in accordance with the invention also appears to cause a decrease in branching (branches/1000 carbon atoms). Thus the use of TM-4 in example P3-2 exhibited 89.0 branches/1000 carbon atoms while the use of the same catalyst supported in
30 example P2-2 exhibited 80.1 branches/1000 carbon atoms, a decrease of about 10%. Similarly, the use of TM-3 in example P3-1 exhibited 88.6 branches/1000 carbon atoms while the use of the dibromide derivative TM-2 in example P2-1 exhibited 74.7 branches/1000 carbon atoms, a decrease of about 15%. Since branching is directly related to density and to melting point (MP) the differences will provide significant advantages for
35 particle form processes such as gas phase and slurry polymerization processes.

The use of the supported catalyst systems of the invention also allow for increases in both M_w and activity as compared to that to be expected from the teachings in the prior art

with respect to use in solution polymerization of the late transition metal catalyst systems in unsupported form. Example P2-3 can be compared to P2-4 for exemplification of the increased M_w from increased pressure when the catalysts are supported, the M_w was 1.086×10^6 at 300 psia (2068 kPa) and 6.08×10^5 at 75.0 psia (517 kPa). The examples of

5 Brookhart, et al, (Table V, C-1 vs. C-2) illustrate that one skilled in the art would expect little change in MW from increasing pressure, the M_w was 1.6×10^6 at 14.7 psia (101 kPa) and 1.4×10^6 at 58.8 psia (405 kPa). Additionally, the polymer product yields of Brookhart, *et al, supra*, were essentially unchanged by the exhibited pressure change (2.1 g and 2.2 g, both after 30 min.). The supported catalyst of examples P2-3 and P2-4 showed that at

10 higher pressure, only 20% less polymer was produced despite being run only one third of the time.

We claim :

CLAIMS:

- 24 -

- 5 1. A late transition metal catalyst system comprising a Group 9, 10 or 11 metal complex stabilized by a bidentate ligand structure immobilized on a solid support where the catalyst loading is less than 100 micromoles transition metal compound per gram of solid support.
- 10 2. The catalyst system of claim 1 wherein said particle support comprises silica.
3. The catalyst system of claim 1 wherein the supported catalyst is a homogeneous supported catalyst.
- 15 4. The catalyst system of claim 1 wherein the metal complex is a first row metal complex.
- 20 5. The catalyst system of claim 1 comprising a Group 9, 10 or 11 metal complex stabilized by a bidentate ligand structure having conjugated groups on a bridging element in said ligand.
6. A late transition metal catalyst system comprising a Group 9, 10 or 11 metal complex stabilized by a bidentate ligand structure, an organoaluminum compound, and a solid support.
- 25 7. The catalyst system of claim 6 wherein the organoaluminum compound is an alumoxane.
8. The catalyst of claim 7 wherein the metal complex to alumoxane molar ratio is from about 1:500 to 10:1.
- 30 9. The catalyst system of claim 6 wherein the Group 9, 10 or 11 metal complex is represented by the formula:



35

wherein L is a bidentate ligand that stabilizes a square planar geometry and charge balances the oxidation state of MX_r ; X is independently selected from the group consisting of a halogen, alkoxide, aryloxy, amide, phosphide or other univalent anionic ligand, or two such X are joined to form an anionic chelating ligand;

and r is 0, 1, 2 or 3.

10. The catalyst system of claim 6 wherein said particle support comprises silica.
- 5 11. The catalyst system of claim 6 wherein the supported catalyst is a homogeneous supported catalyst.
12. The catalyst system of claim 6 wherein the metal complex is a first row metal complex.
- 10 13. A late transition metal catalyst system essentially without residual solvent comprising a Group 9, 10 or 11 metal complex stabilized by a bidentate ligand structure immobilized on a solid support.
- 15 14. The catalyst system of claim 13 wherein said particle support comprises silica.
15. The catalyst system of claim 13 wherein the supported catalyst is a homogeneous supported catalyst.
- 20 16. The catalyst system of claim 13 wherein the metal complex is a first row metal complex.
17. The catalyst system of claim 13 wherein said complex is an ionic catalyst comprising a metal cation and a noncoordinating anion.
- 25 18. The catalyst system of claim 17 wherein the noncoordinating anion is tetrakis(perfluorophenyl)boron.
19. The catalyst system of claim 17 wherein the ionic catalyst is prepared using an anion ionizing precursor that is a halide salt of Group 13-16 metals or metalloids.
- 30 20. The catalyst of claim 17 wherein the metal complex to ionizing anion precursor molar ratio is from about 10:1 to 1:10.
- 35 21. The catalyst system of claim 1 wherein said complex is an ionic catalyst comprising a metal cation and a noncoordinating anion.

- 5 22. The polymerization process for polymerizing olefinically unsaturated monomers comprising contacting one or more of ethylene, C₃-C₂₀ olefin, C₄-C₂₀ cyclic olefin, C₄-C₂₀ non-conjugated diolefin, C₈-C₂₀ aromatic substituted olefin, C₄-C₂₀ gem-substituted olefins, or C₂₀-C₁₀₀₀ olefin macromer with the catalyst system of claim 1.
- 10 23. The polymerization process of claim 22 comprising conducting said contacting under gas phase polymerization conditions.
24. The polymerization process of claim 23 wherein the reactor temperature is from -100 °C to 150 °C and at a pressure up to 7000 kPa.
- 15 25. The polymerization process of claim 24 additionally comprising a scavenging compound.
- 20 26. The polymerization process of claim 22 comprising conducting said contacting under slurry polymerization conditions.
27. The polymerization process of claim 26 wherein the reactor temperature is from 0 °C to 150 °C and at a pressure from 0.76 MPa to 4.8 Mpa
- 25 28. The polymerization process for polymerizing olefinically unsaturated monomers comprising contacting one or more of ethylene, C₃-C₂₀ olefin, C₄-C₂₀ cyclic olefin, C₄-C₂₀ non-conjugated diolefin, C₈-C₂₀ aromatic substituted olefin, C₄-C₂₀ gem-substituted olefins, or C₂₀-C₁₀₀₀ olefin macromer with the catalyst system of claim 6.
- 30 29. The polymerization process for polymerizing olefinically unsaturated monomers comprising contacting one or more of ethylene, C₃-C₂₀ olefin, C₄-C₂₀ cyclic olefin, C₄-C₂₀ non-conjugated diolefin, C₈-C₂₀ aromatic substituted olefin, C₄-C₂₀ gem-substituted olefins, or C₂₀-C₁₀₀₀ olefin macromer with the catalyst system of claim 13.

INTERNATIONAL SEARCH REPORT

International Application No. **PCT/US 97/10418**

A. CLASSIFICATION OF SUBJECT MATTER C 08 F 4/80.B 01 J 31/28,C 08 F 4/02,C 08 F 10/00				
According to International Patent Classification (IPC) or to both national classification and IPC ⁶				
B. FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) B 01 J,C 07 F,C 08 F,C 08 G				
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched				
Electronic data base consulted during the international search (name of data base and, where practical, search terms used)				
C. DOCUMENTS CONSIDERED TO BE RELEVANT				
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.		
X	US 3759889 A (BAUER et al.) 18 September 1973 (18.09.73), examples 3-5, claims 1-11. --	1-5, 9, 22, 26, 27		
X	US 3686159 A (BAUER et al.) 22 August 1972 (22.08.72), examples 14, 23, claims 1-12. --	1-5, 9, 22, 26, 27		
X	US 4716205 A (KLABUNDE) 29 December 1987 (29.12.87), example 30, claims 1, 2, 4, column 7, lines 7-15, 47-53. --	1-4, 9, 13, 15, 16, 22, 26, 27		
X	US 5227464 A (KEIJSPER) 13 July 1993 (13.07.93).	1, 13, 15, 17, 22-24		
<input checked="" type="checkbox"/> Further documents are listed in the continuation of box C. <input type="checkbox"/> Patent family members are listed in annex.				
* Special categories of cited documents :				
<table style="width: 100%; border: none;"> <tr> <td style="width: 50%; vertical-align: top; border: none;"> "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier document but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed </td> <td style="width: 50%; vertical-align: top; border: none;"> "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art. "Z" document member of the same patent family </td> </tr> </table>			"A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier document but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art. "Z" document member of the same patent family
"A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier document but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art. "Z" document member of the same patent family			
Date of the actual completion of the international search 24 September 1997		Date of mailing of the international search report 10. 11. 97		
Name and mailing address of the ISA European Patent Office, P.O. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Tx. 31 651 epo nl, Fax (+31-70) 340-3016		Authorized officer PUSTERER e.h.		

INTERNATIONAL SEARCH REPORT

-2-

International A. class No.
PCT/US 97/10418

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
	examples, claim 1, column 5, lines 9-22, column 6, lines 56-61. --	
X	US 5055552 A (WONG) 08 October 1991 (08.10.91), examples. --	1, 22, 26, 27
X	US 5340787 A (KEIJSPER) 23 August 1994 (23.08.94), examples. --	1
A	WO 94/01471 A1 (EXXON CHEMICAL PATENTS INC.) 20 January 1994 (20.01.94), claims 1, 11, 12, 14-17, 22, 27, page 9, lines 27-30, page 16, lines 24-26, page 18, lines 12-14, page 20, lines 15-21. -----	1-29

ANHANG

zum internationalen Recherchen-
bericht über die internationale
Patentanmeldung Nr.

ANNEX

to the International Search
Report to the International Patent
Application No.

ANNEXE

au rapport de recherche inter-
national relatif à la demande de brevet
international n°

PCT/US 97/10418 SAE 164143

In diesem Anhang sind die Mitglieder
der Patentfamilien der in obenge-
nannten internationalen Recherchenbericht
angeführten Patentdokumente angegeben.
Diese Angaben dienen nur zur Unter-
richtung und erfolgen ohne Gewähr.

This Annex lists the patent family
members relating to the patent documents
cited in the above-mentioned inter-
national search report. The Office is
in no way liable for these particulars
which are given merely for the purpose
of information.

La présente annexe indique les
membres de la famille de brevets
relatifs aux documents de brevets cités
dans le rapport de recherche inter-
national visé ci-dessus. Les renseigne-
ments fournis sont donnés à titre indica-
tif et n'engagent pas la responsabilité
de l'Office.

In Recherchenbericht angeführtes Patentdokument Patent document cited in search report Document de brevet cité dans le rapport de recherche	Datum der Veröffentlichung Publication date Date de publication	Mitglied(er) der Patentfamilie Patent family member(s) Membre(s) de la famille de brevets	Datum der Veröffentlichung Publication date Date de publication
US A 3759889	18-09-73	BE A1 761525 DE A1 2101381 FR A1 2101381 NL A1 2101381 US A 2101381	13-07-71 13-07-71 08-10-71 19-07-71 09-05-72
US A 3686159	22-08-72	keine - none - rien	
US A 4716205	29-12-87	keine - none - rien	
US A 5227464	13-07-93	AU A1 13022792 AU B2 652810 CA AA 2063481 CN A 1065074 EP A1 506168 JP A2 5086178 US A 50436214 ZA A 9202008	24-09-92 08-09-94 22-09-92 07-10-92 30-09-92 06-04-93 25-07-93 25-11-93
US A 5055552	08-10-91	CA AA 2018760 DE CO 69014184 FR T3 69014184 EP A2 4042388 EP A3 4042388 EP B1 4042388 JP A2 5031322	14-12-90 23-12-94 26-03-98 27-12-90 12-06-91 17-11-94 12-02-91
US A 5340787	23-08-94	US A 5237047 AU A1 15275792 AU B2 6503438 BR A 9201592 CA AA 2067407 CN A 1066276 EP A1 5117113 JP A2 5140301 ZA A 9203108 BR A 9201497	17-08-93 05-11-92 16-06-94 15-12-92 02-11-92 18-11-92 04-11-93 08-06-93 30-12-92 26-10-93
WD A1 9401471	20-01-94	EP A1 648230 JP T2 7509016 US A 5502124 US A 5504049	19-04-95 05-10-95 26-03-96 02-04-96